



Quadloc® Model 4422 Comparison Sheet

THE MORE COMPACT QUADLOC® MODEL 4422

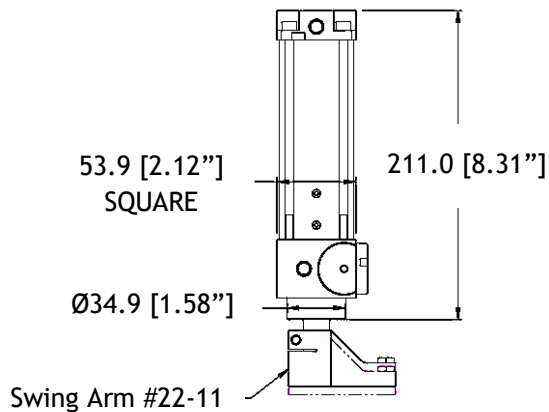

LEADING COMPARABLE COMPETITOR

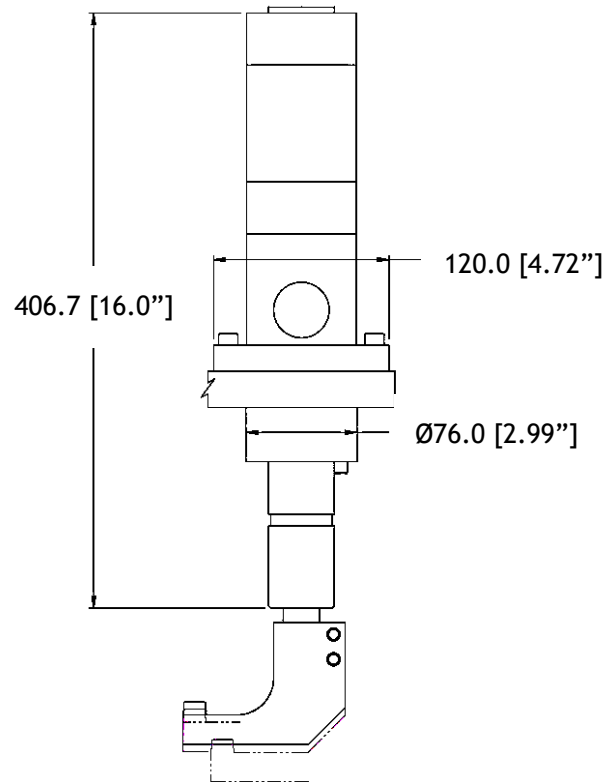

- | | |
|--|---|
| <ul style="list-style-type: none"> • No design time necessary because it's an all-in-one locking swing arm clamp • Stays locked through loss of power • Only one accessory (Swing Arm #22-11) needed • 250lbs of clamp force at 60psi • 500lbs of holding force regardless of clamping force, with or without air • Independent rotate that requires no extra clearance • Swing stroke - None • Clamping stroke - 5.8mm • Total Weight - 4.9lbs • Total price - \$2,987 / EA. | <ul style="list-style-type: none"> • Significant design time required to create a locking swing arm clamp • Requires multiple components (Cylinder, Rod Locks, Cam Rotating Shaft Assembly, Adapters, Couplers, Swing Arm, etc..) to create a locking swing arm cylinder • 260lbs of clamping force at 60psi • Holding force of 450lbs with loss of air only • Extra clearance required due to its cam slot rotate • Swing stroke - 25mm • Clamping stroke - 5.0mm • Total Weight - 26.5lbs • Total price - \$4,790 / EA. |
|--|---|